



Model 2313 Piezoelectric force sensor

Features

- Charge Mode, no external power required
- Rigid quartz elements
- Wide compression Range
- Heavy duty




Description


The Endevco® model 2313 is a quartz, piezoelectric force transducer for use with high force vibration exciters. Its wide temperature range makes it suitable for operation in combined environment testing (vibration and temperature). It is useful in modal analysis where the testing might require more than one amplitude range. The stainless steel body and quartz sensing elements are used for maximum rigidity. The large diameter provides for a large force area, thus allowing a high dynamic range up to 40 000 lb. The high resonance frequency of the Endevco model 2313 allows for the accurate measurement of short duration, fast rise time force transients.

Designed for use with a charge amplifier, the output is negative for compression and positive for tension. The electrical connector exits axially for use in installations where space is limited. A 3/8-16 tapped mounting hole is provided in the upper platen to accept an impact cap or for threaded attachment to a test article.

Endevco model 133 or OASIS are recommended signal conditioners for use with the 2313 force sensors.

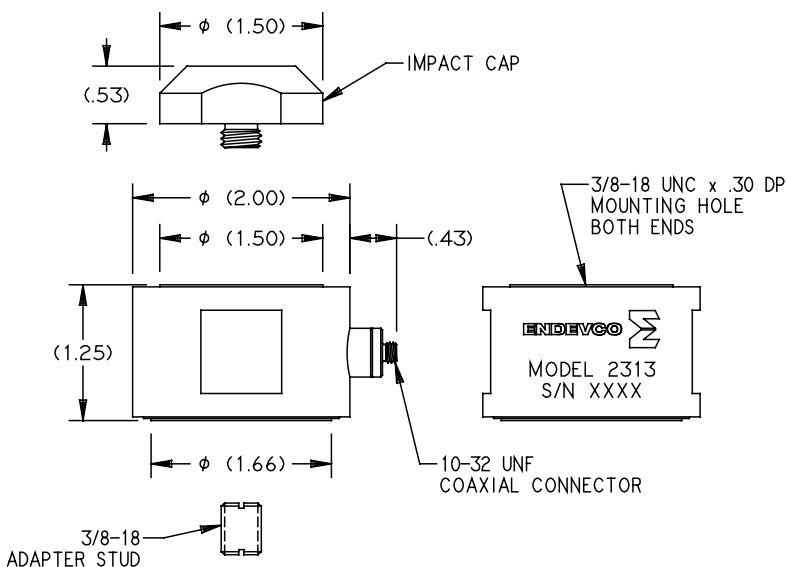

BRAYO: 23XX

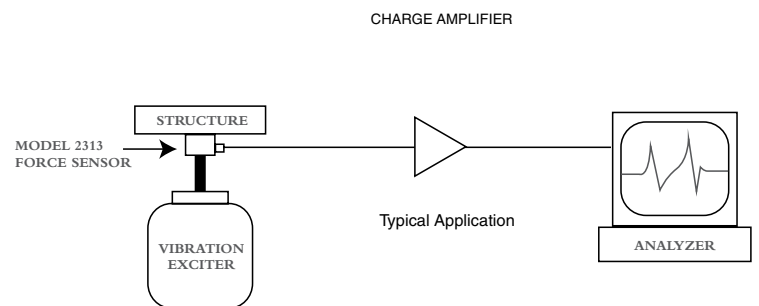

Model 2313 Piezoelectric force sensor

Endevco

Specifications

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C), 4 mA and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied

Dynamic characteristics

	Units	Value
Compression range	lbf (k Newtons)	25 000 (111.2)
Sensitivity	pC/lb (pF Newton)	-9 (2)
Natural frequency (nom.)	kHz	75
Maximum compression	Lbf (k Newtons)	40 000 (177.9)
Maximum tension	Lbf (Newtons)	1 000 (4448)
Linearity	%	± 1

Output characteristics

Output polarity	Compressive force produces negative output.
Capacitance	pF 650
Grounding	Signal ground connected to case

Environmental characteristics

Temperature range	°F (°C)	-100 to 500 (-73 to 260)
Humidity	Epoxy Sealed	
Maximum vibration limit	g	±3 000
Shock limit	g	5 000
Coefficient of thermal sensitivity	%/°F (%/°C)	0.01 (0.02)

Physical characteristics

Dimensions	See outline drawing	
Weight	grams	420
Case material	17-4 PH stainless steel	
Connector/cable	Side-mounted 10-32 receptacle, mates with Endevco 3000 series cable.	
Mounting threads	3/8-16 top and bottom	

Calibration

Supplied
Sensitivity pC/lbf

Accessories supplied

EHM 1694	Impact tip
EHM 1695	3/8 - 18 stud

Notes:

1. Tension rating is limited by the transducer design.
2. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 800-982-6732 for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.



Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.

© ENDEVCO CORPORATION. ALL RIGHTS RESERVED 30700 RANCHO VIEJO ROAD, SAN JUAN CAPISTRANO, CA92675 USA
(800) 982-6732 • (949) 493-8181 fax (949) 661-7231 • www.endevco.com • Email: applications@endevco.com

0309

MEGGITT
smart engineering for
extreme environments