





## Model 6237 M70/M71 Piezoelectric accelerometer

### Features

- +1200°F (+650°C) operation
- Integral hardline cable
- Single bolt mount
- Ground isolated
- Gas turbine testing

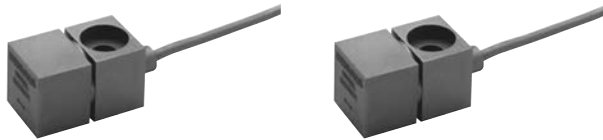

### Sensitive axis

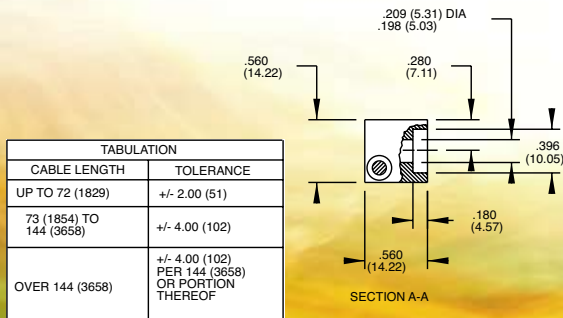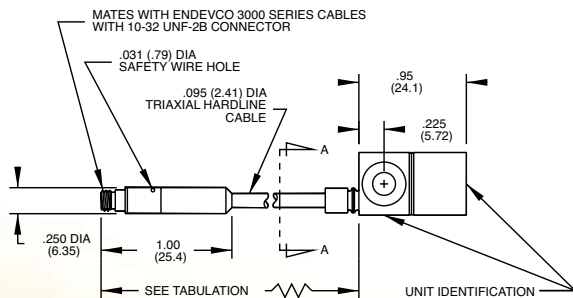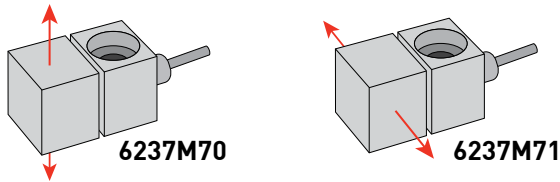



STANDARD TOLERANCE  
INCHES (MILLIMETERS)  
.XX = +/- .02 (X = +/- .5)  
.XXX = +/- .010 (XX = +/- .25)

### Description

The Endevco® model 6237M70 and 6237M71 piezoelectric accelerometers are designed specifically for use in extremely high temperature environments such as those experienced on aircraft gas turbines. These accelerometers are designed for continuous operation at +1200°F with long Mean Time Between Failure (MTBF). The small size and light weight of these accelerometers permit installation in cramped locations with minimal structural support. The accelerometer is a self-generating device that requires no external power source for operation.

Models 6237M70/M71 incorporate Endevco's Piezite® Type P-15 crystal in a shear design. The 6237M70 and 6237M71 differ in their internal design and in the direction of the sensitive axis. The 6237M70 has its sensitive axis located in line with the mounting screw, while the 6237M71 is oriented perpendicular, or transverse, to the mounting screw. The sensing elements and integral shield are isolated from the case. These accelerometers feature an integral hardline cable with a standard length of 120 inches. Other cable lengths are also available on special order.

Endevco signal conditioner model 2721B is recommended for use with this high impedance accelerometer.

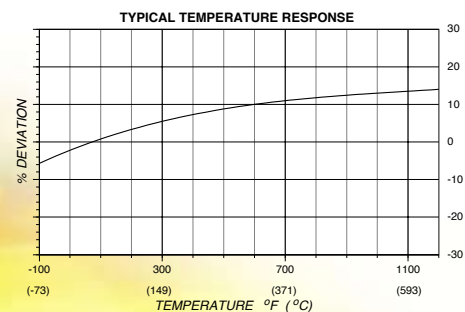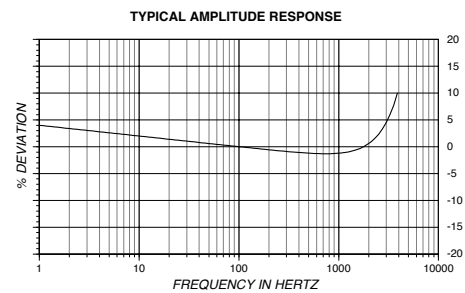

# Model 6237 M70/M71 Piezoelectric accelerometer

Endevco

## Specifications

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C), 100 Hz and 10 Vdc unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

### Dynamic characteristics

	<b>Units</b>	
Charge sensitivity, ±5%	pC/g	10
Frequency response [1]		See typical amplitude response
Resonance frequency	kHz	11
Amplitude response [2]		
±5%	Hz	1 to 3000
±1 dB	Hz	1 to 5000
Temperature response [3]		See typical curve
Transverse sensitivity	%	≤ 5
Amplitude linearity		
per 500 g, 0 to 2000 g	%	1

### Electrical characteristics

Output polarity		Acceleration directed into base of unit produces positive output at center socket of receptacle
Resistance [4]		
at +1200°F (+650°C)	kΩ	≥ 10
Isolation		
at +1200°F (+650°C)	kΩ	≥ 500
Hardline cable resistivity		
two places at +1200°F (+650°C)	kΩ-ft	100
Capacitance		
transducer (excluding cable)	pF	60
hardline cable capacitance	pF/ft (pF/m)	100 (328)
(center conductor to inner shield)		
Grounding		Signal return isolated from case

### Environmental characteristics

Temperature range		
transducer/hardline cable [5]		-67°F to +1200°F [-55°C to +650°C]
Connector		-67°F to +500°F [-55°C to +260°C]
Humidity		
transducer/cable		Open to environment via vent hole in splash protected area
connector		Epoxy sealed, non-hermetic
Sinusoidal vibration limit	g pk	500
Shock limit	g pk	2000

### Physical characteristics

Dimensions		See outline drawing
Weight (excluding cable)	gm (oz)	30 (1.1)
Case material		Inconel
Hardline cable		Triaxial, 0.095 inch diameter, Inconel jacketed, mineral oxide insulated
Connector		Coaxial receptacle with 10-32 UNF threads designed to mate with Endevco 3000 series cable assembly or equivalent. Receptacle must be handled with care
Mounting torque	lbf-in (Nm)	18 (2)

### Calibration data supplied

Charge sensitivity	pC/g
Transverse sensitivity	%
Capacitance	pF

### Notes:

- Frequency response is controlled by the resonance characteristics of the transducer. Estimated calibration errors are ±1.5% to 900 Hz and 2.5% from 900 Hz to 5000 Hz.
- Low-end response of the transducer is a function of its associated electronics.
- Spurious high frequency discharge may be exhibited by this device for several minutes after exposure to temperature transients of greater than +100°F (+38°C) per minute.
- The electrical resistance of piezoelectric materials decreases with an increase in temperature and can approach 10 000Ω at +1200°F (+650°C).
- For cable lengths of less than 12 inches (0.30 m), the maximum operating temperature is +500°F (+260°C). The temperature charge deviation at +500°F (+260°C) is typically +8%.
- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 800-982-6732 for recommended intervals, pricing and turnaround time for these services as well as for quotations on our standard products calibration services. Call Endevco's inside sales force at 800-982-6732 for recommended intervals, pricing and turn around time for these services as well as for quotations on our standard products.

### Included accessories

P/N EH471	Mounting screw, 10-32 x 0.75 in, 12 pt
-----------	---

### Optional accessories

Model 3090C-XXX	Cable assembly
-----------------	----------------



Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.