




Model 7264B Piezoresistive accelerometer

Features

- Mechanical overtravel stops
- Small size, rugged
- Crash and shock testing
- 500 g and 2000 g full scale ranges
- DC response - long duration transients

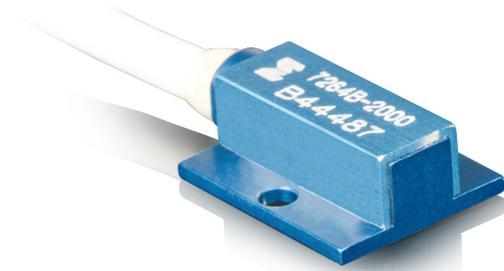



Description

The Endevco® model 7264B is a very low mass piezoresistive accelerometer weighing only 1 gram. This accelerometer is designed for crash testing, flutter testing, rough road testing and similar applications that require minimal mass loading and a broad frequency response. Used for shock testing of lightweight systems or structures, the model 7264B accelerometer also meets SAEJ211 specifications for instrumentation for impact testing and SAEJ2570 specification for anthropomorphic test device transducers.

The model 7264B utilizes an advanced micromachined sensor which includes integral mechanical stops. This monolithic sensor offers improved ruggedness, stability and reliability over previous designs. The model 7264B has minimum damping, thereby producing no phase shift over the useful frequency range. With a frequency response extending down to dc (steady state acceleration), this accelerometer is ideal for measuring long duration transients as well as short duration shocks.

The model 7264B offers excellent linearity and a wide frequency response. Further, this accelerometer offers stable performance over the temperature range of -40°F to +200°F (-40°C to +93°C) and has a full bridge circuit with fixed resistors for shunt calibration. This accelerometer has a full scale output of 400 mV with 10 Vdc excitation. It is also available with less than 1% transverse sensitivity ("T" option). For calibration at 5 Vdc, request the M2 option.

Endevco model 136 or 436 three-channel system, model 4430A or Oasis 2000 computer-controlled system are recommended as signal conditioner and power supply. U.S. Patents 4,498,229 and 4,605,919

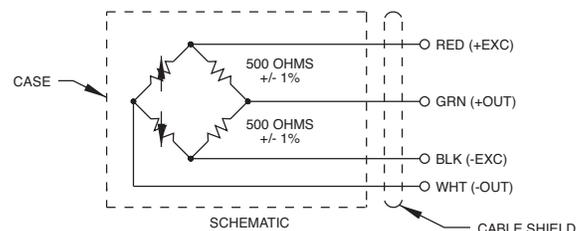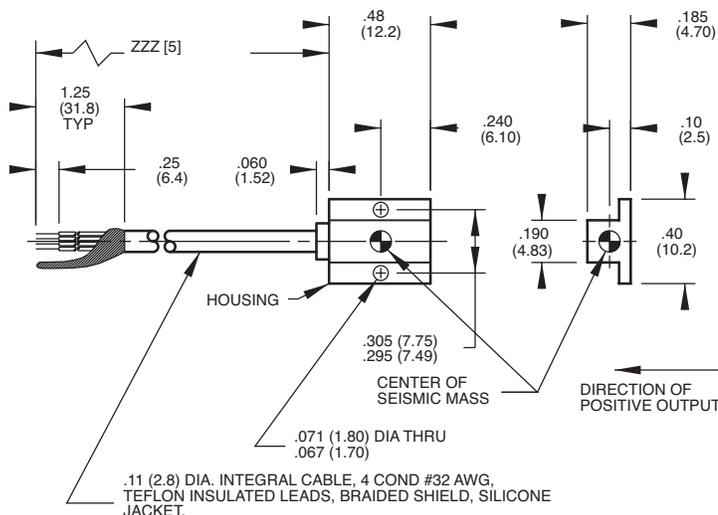

STANDARD TOLERANCE
INCHES (MILLIMETERS)
.XX = +/- .02 (X = +/- .5)
.XXX = +/- .010 (XX = +/- .25)

Model 7264B Piezoresistive Accelerometer

Endevco

Specifications

Dynamic characteristics	Units	7264B-500	7264B-2000
Range	g	±500	±2000
Sensitivity (at 100 Hz)	mV/g Typ (Min)	0.80 (0.40)	0.20 (0.15)
Amplitude response ±5%	Hz	0 to 3000	0 to 5000
Mounted resonance frequency	Hz	17 000	28 000
Damping ratio	Typ	0.05	0.05
Non-linearity and hysteresis [% of reading, to full range]	% Max	±1	±1
Transverse sensitivity [1]	% Max	3	3
Zero measurand output	mV Max	±25	±25
Thermal zero shift From 0°F to +150°F [-18°C to +66°C], ref. 75°F [24°C]	mV Max	±25	±25
Thermal sensitivity shift From 0°F to +150°F [-18°C to +66°C], ref. 75°F [24°C]	% / °F Typ % / °C Typ	-0.06 -0.10	-0.06 -0.10
Warm-up time	ms Max	1, 15 µ sec typical	1, 15 µ sec typical
Base strain sensitivity (Per ISA 37.2 @ 250 µ strain)	Equiv. g's	≤ 0.1	≤ 0.1
Mechanical overtravel stops	g's	1500 g typical, 750 g minimum	5000 g typical, 2500 g minimum
Electrical characteristics			
Excitation [2]		10.0 Vdc (5 Vdc and 2 Vdc optional)	10.0 Vdc (5 Vdc and 2 Vdc optional)
Input resistance [3]		300 to 900 ohms	300 to 900 ohms
Output resistance [3]		400 to 1600 ohms	400 to 1600 ohms
Fixed resistors		500 ohms ±1%	500 ohms ±1%
Insulation resistance		100 megohms minimum at 100 Vdc; leads to case, leads to shield, shield to case	
Physical characteristics			
Case material		Blue anodized aluminum alloy	Blue anodized aluminum alloy
Electrical connections		Integral cable, four conductor No. 32 AWG Teflon® insulated leads, braided shield, silicone jacket. Cable length specified at time of order [5] Holes for two 0-80 mounting screws/3 lbf-in (0.3 Nm)	
Mounting torque			
Weight		1 gram (cable weighs 9 grams/meter)	
Environmental characteristics			
Acceleration limits (in any direction)			
Static		5000 g	10 000 g
Sinusoidal vibration		1000 g pk below 3kHz	1000 g pk below 5kHz
Shock (half-sine pulse duration)		5000 g, 300 µ sec or longer	10 000 g, 200 µ sec or longer
Temperature			
Operating		-40°F to +200°F [-40°C to +93°C]	-40°F to +200°F [-40°C to +93°C]
Storage		-65°F to +250°F [-54°C to +121°C]	-65°F to +250°F [-54°C to +121°C]
Humidity		Unit is epoxy sealed	Unit is epoxy sealed
Altitude		Unaffected	Unaffected
Calibration [6]			
Sensitivity (at 100 Hz and 10 g pk)	mV/g		mV/g
Frequency response		20 Hz to 3000 Hz, % deviation reference 100 Hz; dB plot continued from 3000 to 30 000 Hz for 7264B-500; 20 Hz to 5000 Hz, % deviation reference 100 Hz; dB plot continued from 5000 to 30 000 Hz for 7264B-2000	
Zero measurand output	mV		mV
Maximum transverse sensitivity	% of sensitivity		% of sensitivity
Input and output resistance	Ohms		Ohms

Notes:

- 1% transverse sensitivity available as "T" option.
- Lower excitation voltages may be used but should be specified at time of order to obtain best calibration. 5 Vdc option = M2
- Measured at approximately 1 Vdc. Bridge resistance increases with applied voltage due to heat dissipation in the strain gage elements.
- The safety sleeve should be kept on unit when not in use to prevent possible handling damage.
- Order options are as follows: 7264B-XXXXT-ZZZ. "7264B" is the base model number. "-XXXX" is the full acceleration range. "T" is a suffix added to the range number. "-ZZZ" is the cable length in inches.
- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 800-982-6732 for recommended intervals, pricing and turnaround time for these services as well as for quotations on our standard products.

Included accessories

EHM35	(1) Hex wrench
EHW196	(2) Size-0 flat washers
EH492	(2) 0-80 x 3/16 inch socket head cap screws
16365-2	safety sleeve [4]

Optional accessories

24328 -1, -2, -3	4 Conductor shielded cable
7964B	Triaxial mounting block



Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.