

## Model 7264D Piezoresistive accelerometer

### Features

- Mechanical overtravel stops
- Small size, rugged
- Crash and shock testing
- 2000 g full scale range
- DC response - long duration transients



### Description



The Endevco® Model 7264D is a very low mass piezoresistive accelerometer weighing only 1 gram. This accelerometer is designed for crash testing, flutter testing, rough road testing and similar applications that require minimal mass loading and a broad frequency response. This accelerometer meets SAEJ211 specifications for instrumentation for impact testing and SAEJ2570 specification for anthropomorphic testing. It is a direct replacement for the Endevco Model 7264-2000 and 7264C in that the location of the center of seismic mass is the same.

The Model 7264D utilizes an advanced micromachined sensor which includes integral mechanical stops. This monolithic sensor offers improved ruggedness, stability and reliability over previous designs. The Model 7264D has minimum damping, thereby producing no phase shift over the useful frequency range. With a frequency response extending down to dc (steady state acceleration) this accelerometer is ideal for measuring long duration transient shocks.

This accelerometer has a full bridge circuit with fixed resistors for shunt calibration. Full scale output is 400 mV with 10Vdc excitation. It is also available with less than 1% transverse sensitivity ("T" option) and less than  $\pm 25$  mV zero measurand output ("Z" option).

Endevco Model 136 DC differential voltage amplifier, Model 4430A bridge conditioner, or Oasis 2000 computer-controlled system are recommended as signal conditioner and power supply.

U.S. Patents 4,498,229 and 4,605,919 apply.

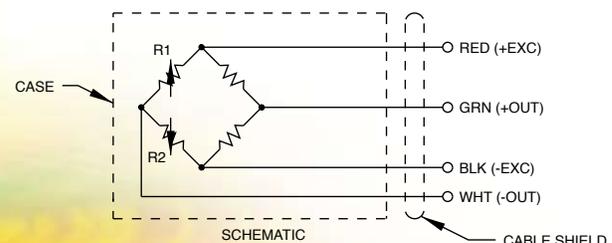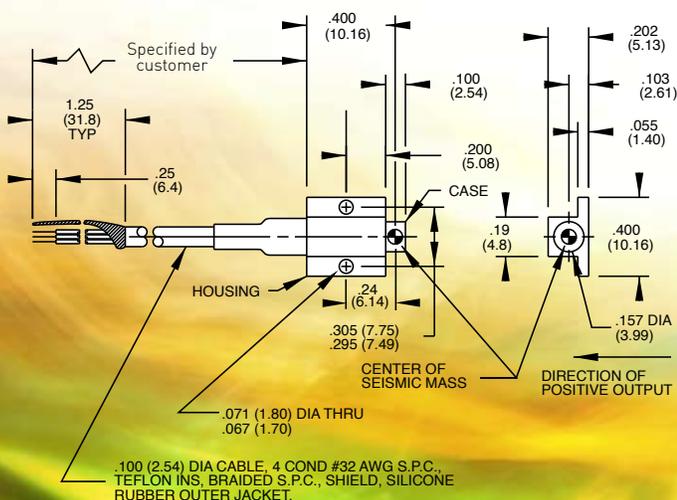

STANDARD TOLERANCE  
INCHES (MILLIMETERS)  
.XX = +/- .03 (X = +/- .8)  
.XXX = +/- .010 (XX = +/- .25)

# Model 7264D Piezoresistive accelerometer

Endevco

## SPECIFICATIONS

	Units	7264D-2000
RANGE	g	±2000
SENSITIVITY (at 100 Hz & 10g)	mV/g Typ (Min)	0.20 (0.15)
FREQUENCY RESPONSE (±2% max, ref. 100 Hz) (±5% max, ref. 100 Hz)	Hz	0 to 3000 0 to 6000
MOUNTED RESONANCE FREQUENCY	Hz Typ	40 000
DAMPING RATIO	Max	0.05
NON-LINEARITY (% of reading, to full range)	% Max	±1
REPEATABILITY (after full scale shock)	equiv. g	0.2
TRANSVERSE SENSITIVITY	% Max	1
ZERO MEASURAND OUTPUT	mV Max	±25
THERMAL ZERO SHIFT		
	mV Typ	±10
From 0°F to +150°F (-18°C to +66°C), ref 75°F(24°C)	mV Max	±25
THERMAL SENSITIVITY SHIFT	%/°F Typ	- 0.06
From 0°F to +150°F (-18°C to +66°C)	%/°C Typ	-0.10
From 65°F to +85°F (+18°C to +29°C), ref 75°F(24°C)	±% Typ	1.0
WARM-UP TIME	ms Max	1, 15 μ sec typical
BASE STRAIN SENSITIVITY (Per ISA 37.2 @ 250 μ strain)	Equiv. g's	< 0.1
MECHANICAL OVERTRAVEL STOPS	g's	5000 g typical, 2500 g minimum

### ELECTRICAL

EXCITATION [4]	2.0 to 10 Vdc
INPUT RESISTANCE [1]	600 ohms nominal
OUTPUT RESISTANCE [1]	600 ohms nominal
INSULATION RESISTANCE	100 megohms minimum at 100 Vdc; leads to case, leads to shield, shield to case

### PHYSICAL

CASE, MATERIAL	Green Anodized aluminum alloy
ELECTRICAL, CONNECTIONS	Integral cable, four conductor No. 32 AWG Teflon® insulated leads, braided shield, silicone jacket (-1 red, -2 white, -3 blue - cable color)
MOUNTING/TORQUE	Holes for two 0-80 mounting screws/3 lbf-in (0.3 Nm)
WEIGHT	1 gram (cable weighs 9 grams/meter)

### ENVIRONMENTAL

ACCELERATION LIMITS (in any direction)	
Static	10 000 g
Sinusoidal Vibration	1000 g pk below 5kHz
Shock (half-sine pulse duration)	10 000 g, 200 μsec or longer
TEMPERATURE	
Operating	0°F to +150°F (-18°C to +66°C)
Storage	-65°F to +250°F (-54°C to +121°C)
HUMIDITY	Unit is epoxy sealed
ALTITUDE	Unaffected

### CALIBRATION DATA SUPPLIED [3]

SENSITIVITY (at 100 Hz and 10 g pk)	mV/g
FREQUENCY RESPONSE	20 Hz to 5000 Hz, % deviation reference 100 Hz; dB plot continued from 5000 Hz through resonance
ZERO MEASURAND OUTPUT	mV @ 10 vac
MAXIMUM TRANSVERSE SENSITIVITY	% of sensitivity
INPUT AND OUTPUT RESISTANCE	Ohms

### INCLUDED ACCESSORIES

EHM35	(1) ALLEN WRENCH
EHW196	(2) SIZE-0 FLAT WASHERS
EH492	(2) 0-80 X 3/16 INCH SOCKET HEAD CAP SCREWS
16365-2	SAFTEY SLEEVE [5]

### OPTIONAL ACCESSORIES

24328 -1,-2,-3	4 CONDUCTOR SHIELDED CABLE
7593	TRIAIAL MOUNTING BLOCK

### NOTES

1. Measured at approximately 1 Vdc.
2. The safety sleeve should be kept on unit when not in use to prevent possible handling damage.
3. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 800-982-6732 for recommended intervals, pricing and turn around time for these services as well as for quotations on our standard products.
4. The 7264D is optimized for linearity of change in ZMO with change to excitation voltage.

Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.

©ENDEVCO CORPORATION. ALL RIGHTS RESERVED 30700 RANCHO VIEJO ROAD, SAN JUAN CAPISTRANO, CA 92675 USA  
(800) 982-6732 • (949) 493-8181 fax (949) 661-7231 • www.endevco.com • Email: applications@endevco.com



0805

**MEGGITT**  
smart engineering for  
extreme environments